


Two Easy Ear Wires



Square

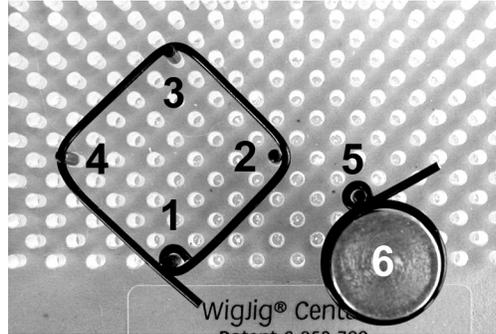

Square Earring



Simple

Step 1: Cut a 4 inch segment of wire

Step 2: Make a loop in the end of this wire with the flat or flush cut using your round nose pliers.

Step 3: Straighten the wire using your nylon jaw pliers.

Step 4: Position pegs 1 and 2 in your jig as shown above. Place the initial loop on peg 1 and bend the wire against peg 2 so that with no pressure applied, the wire will rest adjacent to the hole for peg 3.

Step 5: Add peg 3 and bend the wire against peg 3 so that it rests against the hole for peg 4.

Step 6: Add peg 4 and bend the wire against peg 4 as shown.

Step 7: Remove the wire from your jig and cut the excess wire near the initial loop.

Step 8: Using your bent chain nose pliers, grasp the initial loop and twist it 180 degrees so that it is outside the square.

Step 9: Position your wire on a bench block or anvil and hammer the wire with a chasing hammer or nylon hammer.

Step 10: Add a bead dangle on a head pin and you are done with a Square Earring.

Simple Earring

Step 1: Cut a 2 1/2 inch segment of wire

Step 2: Make a loop in the end of this wire with the flat or flush cut using your round nose pliers.

Step 3: Straighten the wire.

Step 4: Position regular metal peg 5 and a 1/2 inch Super Peg, Peg 6, in your jig as shown. Place the initial loop on peg 5 and wrap the wire around peg 6.

Step 5: Remove the wire from your jig and cut the excess wire near the initial loop.

Step 6: Position your wire on a bench block or anvil and hammer the wire with a chasing hammer or nylon hammer.

Step 7: Add a bead dangle on a head pin and you are done with a Simple Earring.

For more designs visit <http://www.wigjig.com>

Copyrighted by WigJig. Last updated 8/6/2005